



FIG. 184, 185 & 186

PIPE COVERING SADDLE

www.pipingtech.com/fig184-186


- FINISH:** Black, galvanized or painted.
- SERVICE:** Designed to keep insulation from crushing and to reduce heat losses.
- ORDERING:** Specify pipe size, figure number, description, insulation thickness and finish.
- NOTE:** All saddles are 12" long with the side edges turned up.




FIG. 184 - 1" INSULATION

PIPE SIZE	MAX. RECOM. LOAD	APPROX. WEIGHT (lb. per 100)	COVERING THK.	C
3/4	1,200	141	7/8	1 9/16
1	1,200	141	1 1/16	1 7/8
1 1/4	1,200	141	7/8	1 7/8
1 1/2	1,200	151	1	2 1/8
2	1,200	167	1 1/16	2 3/8
2 1/2	1,200	167	1 1/16	2 5/8
3	1,200	188	1	2 15/16
3 1/2	1,200	228	1 1/4	3 7/16
4	1,200	228	1 1/16	3 7/16
5	1,200	228	1	3 15/16
6	1,800	378	1	4 1/2

SCOMPONENTS05.XLS-10/27/11

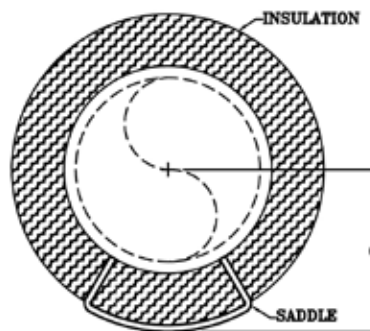

SADDLE - SIZE 1/2"-10"

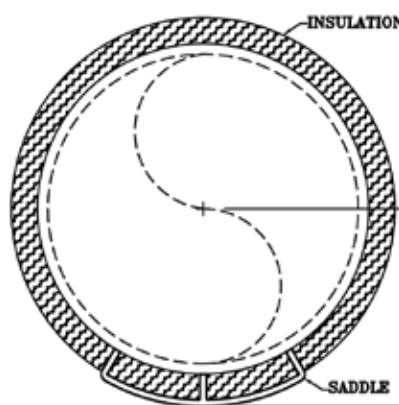

SADDLE - SIZE 12"-LARGER



FIG. 185 - 1 1/2" INSULATION

PIPE SIZE	MAX. RECOM. LOAD	APPROX. WEIGHT (lb. per 100)	COVERING THK.	C
3/4	1,200	210	1 7/16	2 1/8
1	1,200	210	1 9/16	2 3/8
1 1/4	1,200	210	1 5/8	2 5/8
1 1/2	1,200	210	1 1/2	2 5/8
2	1,200	234	1 9/16	2 15/16
2 1/2	1,200	276	1 7/8	3 7/16
3	1,200	276	1 9/16	3 7/16
3 1/2	1,200	321	1 13/16	3 15/16
4	1,200	321	1 9/16	3 15/16
5	1,200	321	1 1/2	4 7/16
6	1,800	442	1 1/2	5
8	5,000	581	1 1/2	6 1/8
10	5,000	581	1 9/16	7 1/4
12	5,000	781	1 9/16	8 1/4
14	5,000	781	1 1/2	8 3/4
16	5,000	844	1 1/2	9 3/4
18	5,000	912	1 1/2	10 3/4
20	7,200	1,044	1 1/2	11 7/8
24	7,200	1,231	1 1/2	13 7/8
30	7,200	1,333	1 1/2	16 7/8
36	7,200	1,803	1 1/2	19 7/8

SCOMPONENTS05.XLS-10/27/11



FIG. 186 - 2" INSULATION

PIPE SIZE	MAX. RECOM. LOAD	APPROX. WEIGHT (lb. per 100)	COVERING THK.	C
3/4	1,200	276	1 7/8	2 5/8
1	1,200	276	2 1/8	2 15/16
1 1/4	1,200	276	1 15/16	2 15/16
1 1/2	1,800	318	2 5/16	3 1/2
2	1,800	319	2 1/8	3 1/2
2 1/2	1,800	319	2 5/16	4
3	1,800	358	2 1/16	4
3 1/2	1,800	358	2 1/4	4 1/2
4	1,800	358	2 1/16	4 1/2
5	1,800	358	2	5
6	1,800	573	2	5 9/16
8	1,800	634	2	6 9/16
10	5,000	765	2 1/16	7 3/4
12	5,000	988	2 1/16	8 3/4
14	5,000	988	2	9 1/4
16	5,000	1,040	2	10 1/4
18	7,200	1,040	2	11 3/8
20	7,200	1,161	2	12 3/8
24	7,200	1,335	2	14 3/8
30	7,200	1,408	2	17 3/8
36	7,200	1,893	2	20 3/8

SCOMPONENTS05.XLS-10/27/11