

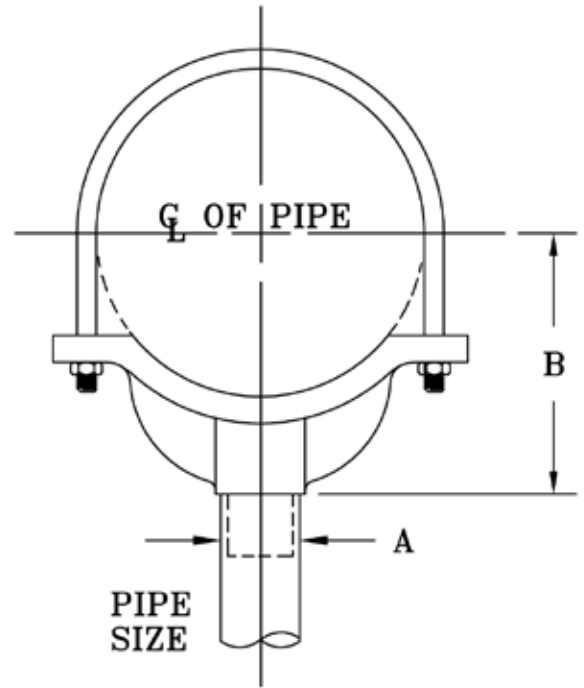


FIG. 48

PIPE SADDLE SUPPORT WITH U-BOLT

www.pipingtech.com/fig48

- MATERIAL:** Carbon steel stanchion saddle with steel U-Bolt and nuts.
- INSTALLATION:**
1. Slip saddle base into riser pipe.
 2. If riser pipe and flange are used, flange is drilled for bolting to steel beam or floor.
 3. Yoke is attached to saddle after pipe is in place.
- ORDERING:** Specify pipe size, figure number, description, material and finish.



SUPPORT ASSEMBLY COMPONENTS

PIPE SIZE	APPROX. WEIGHT (lb. per 100)	A	B
4	1,075	3	4 3/16
5	1,210	3	4 13/16
6	1,270	3	5 7/16
8	2,130	3	6 15/16
10	2,570	3	8 7/16
12	3,120	3	9 15/16
14	5,000	4	10 15/16
16	5,700	4	12 3/8
18	6,400	4	13 7/8
20	11,350	6	15 3/8
24	13,700	6	17 15/16
30	14,650	6	19 1/8
32	17,400	8	21 5/16
36	26,800	8	24 1/2

SCOMPONENTS05.XLS-09/02/11